

Pushbutton Switches

Series 700 - Snap Acting

Contact Rating (UL/CSA): Silver 1A @ 125VAC or 28VDC.



Contact Resistance: 10 mΩ

Operating Temp.: -30 °C to 85 °C

Electrical Life: 50,000 make & break cycles at full load.



Panel Mount.

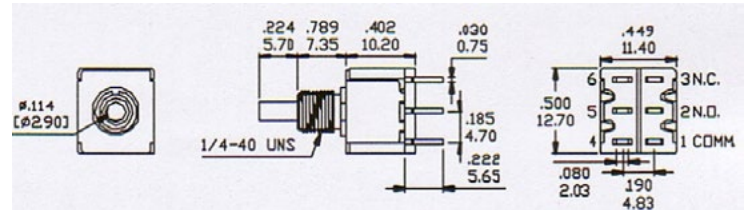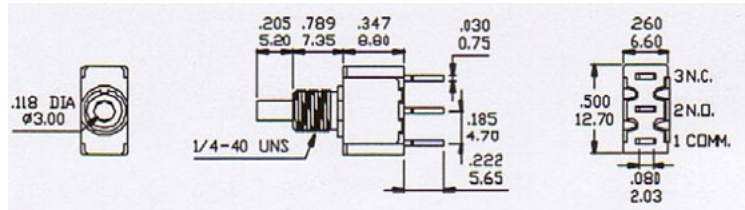

Solder Tag

Part No. 41-T700SPB10M1 SPDT

Part No. 41-T700DPB10M1 DPDT







PCB Terminal

Part No. 41-T700SPB10M2 SPDT

Part No. 41-T700DPB10M2 DPDT

PCB Mount

Right Angle

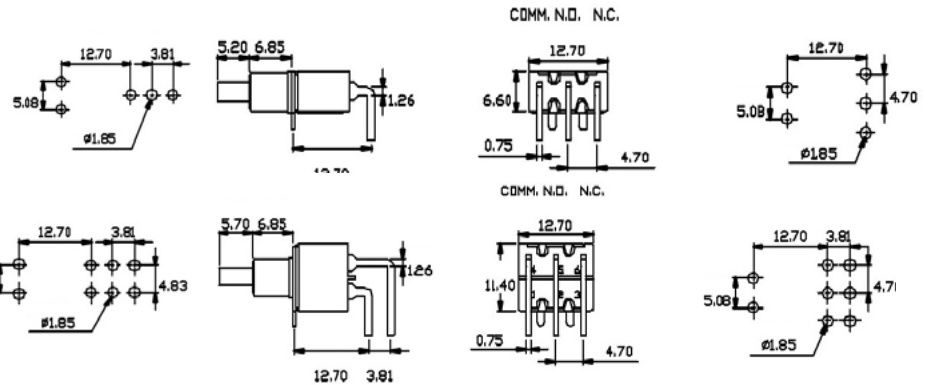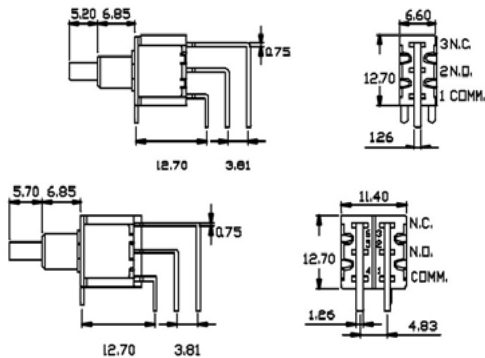

Vertical

Part No. 41-T700SPB20M7 SPDT

Part No. 41-T700DPB20M7 DPDT

Horizontal

Part No. 41-T700SPB20M6 SPDT

Part No. 41-T700DPB20M6 DPDT

Knobs for 700 Series

Part No. 41-T700C1B or R 8.0 x 7.6mm

Part No. 41-T700C2B or R 9.4 x 6.2mm

Part No. 41-T700C4B or R 5.0 x 4.0mm

Dress Nut

Part No. 41-T700WNU020X Brass N.P. 1/4 x 20 UNS

