

Low Profile Wire Protector Style - Miniature

A range of top quality terminal blocks at prices which can mean savings for you.

2 & 3 Pole Modular Interlocking Housing: Polyamide 66 Green (UL94V0)

Wire Guard: Phosphor Bronze Nickel Plated

Voltage Rating: 300V

Approvals: UL, VDE, CE

Vertical



32-DED350V-2P



32-DT126VP-3P



32-DED508V-2P

Part Number	Poles	Pitch mm	Max Current	Max mm ²
32-DED350V-2P	2	3.5	10A	1.5
32-DED350V-3P	3	3.5	10A	1.5




Screws M2 Combination
Torque 2 lb-in

Part Number	Poles	Pitch mm	Max Current	Max mm ²
32-DT126VP-2P	2	5.0	8A	1.5
32-DT126VP-3P	3	5.0	8A	1.5

Screws M2.5 Combination
Torque 4.4 lb-in

Part Number	Poles	Pitch mm	Max Current	Max mm ²
32-DED508V-2P	2	5.08	8A	1.5
32-DED508V-3P	3	5.08	8A	1.5

Screws M2.5 Combination
Torque 3.5 lb-in

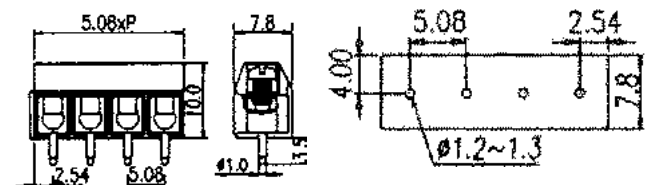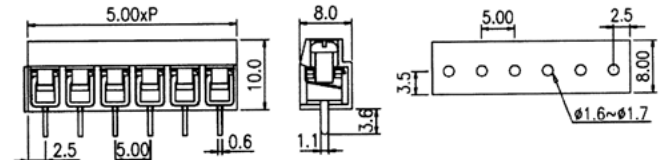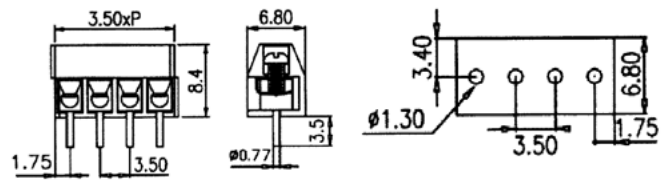

Right Angle



32-DT126RP-3P

Part Number	Poles	Pitch mm	Max Current	Max mm ²
32-DED350R-2P	2	3.5	10A	1.5
32-DED350R-3P	3	3.5	10A	1.5

Screws M2 Combination
Torque 2 lb-in

Part Number	Poles	Pitch mm	Max Current	Max mm ²
32-DT126RP-2P	2	5.0	8A	1.5
32-DT126RP-3P	3	5.0	8A	1.5

Screws M2.5 Combination
Torque 4.4 lb-in

